


High Performance Sorting Systems

Components Catalogue



400 telescopic belt conveyors

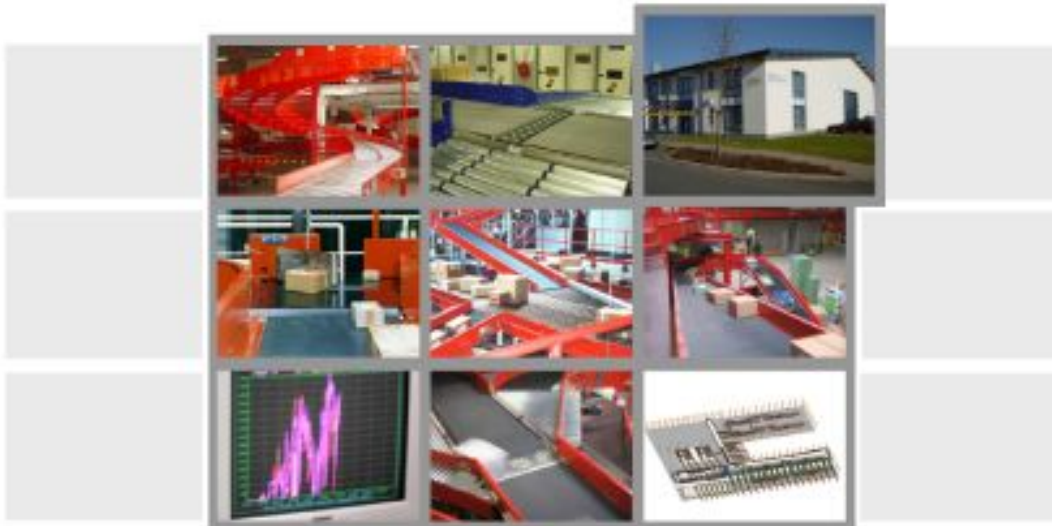

TFG3.5/11,5 600

telescopic conveyor , belt telescope , TFG 3 5/11,5 , belt width 600 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

Separate geared motor for telescopic move and belt drive.

power supply

power supply: 1 x 0,75kW; 1 x 0,37kW

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 11500mm(45,9ft); width: 990mm(3,2ft); min conveying level:600mm(2ft)

conveying medium

Endless welded brand-name belts.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 0,3m/s (60 ft/min)
maximum speed: 0,8m/s (157,5 ft/min)
0,5m/s, other speed on request

additional features

Other conveyor-widths project-related or on request possible.



TFG3.5/11,5 800

telescopic conveyor , belt telescope , TFG 3 5/11,5 , belt width 800 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

Separate geared motor for telescopic move and belt drive.

power supply

power supply: 1 x 0,75kW; 1 x 0,37kW

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 11500mm(37,7ft); width: 1190mm(3,9ft); min conveying level:600mm(2ft)

conveying medium

Endless welded brand-name belts.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 0,3m/s (60 ft/min)
maximum speed: 0,8m/s (157,5 ft/min)
0,5m/s, other speed on request

additional features

Other conveyor-widths project-related or on request possible.



TFG4.5/14 600

telescopic conveyor , belt telescope , TFG 4 5/ 14 , belt width 600 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

Separate geared motor for telescopic move and belt drive.

power supply

power supply: 1 x 0,75kW; 1 x 0,37kW

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 14000mm(45,9ft); width: 990mm(3,2ft); min conveying level:750mm(2,5ft)

conveying medium

Endless welded brand-name belts.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 0,3m/s (60 ft/min)
maximum speed: 0,8m/s (157,5 ft/min)
0,5m/s, other speed on request

additional features

Other conveyor-widths project-related or on request possible.



TFG4.5/14 800

telescopic conveyor , belt telescope , TFG 4 5/14 , belt width 800 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

Separate geared motor for telescopic move and belt drive.

power supply

power supply: 1 x 0,75kW; 1 x 0,37kW

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 14000mm(45,9ft); width: 1190mm(3,9ft); min conveying level:750mm(2,5ft)

conveying medium

Endless welded brand-name belts.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 0,3m/s (60 ft/min)
maximum speed: 0,8m/s (157,5 ft/min)
0,5m/s, other speed on request

additional features

Other conveyor-widths project-related or on request possible.



TFG4.6/18 600

telescopic conveyor , belt telescope , TFG 4 6/18 , belt width 600 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

Separate geared motor for telescopic move and belt drive.

power supply

power supply: 1 x 0,75kW; 1 x 0,37kW

geometric dimensions

base lengt: 6000mm(19,7ft); lel. Length: 18000mm(59,1ft); width: 1190mm(3,9ft); min conveying level:750mm(2,5ft)

conveying medium

Endless welded brand-name belts.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.


speed and performance

minimum speed: 0,3m/s (60 ft/min)
maximum speed: 0,8m/s (157,5 ft/min)
0,5m/s, other speed on request

additional features

Other conveyor-widths project-related or on request possible.

Your way to COMSORT

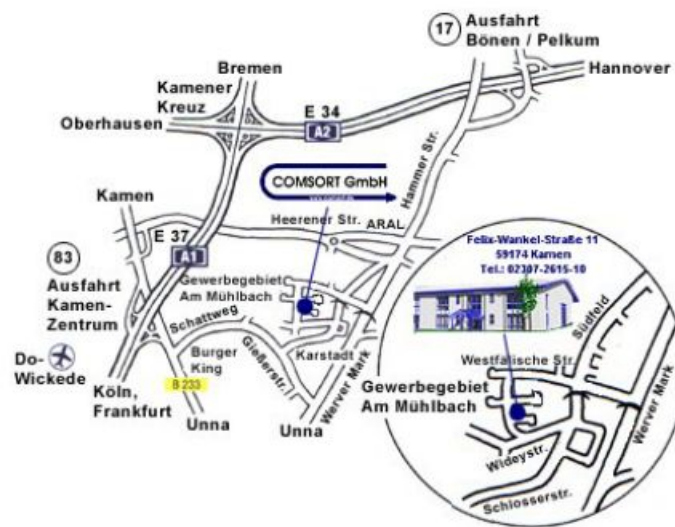

COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de