


High Performance Sorting Systems

Components Catalogue



450 telescopic roller conveyors

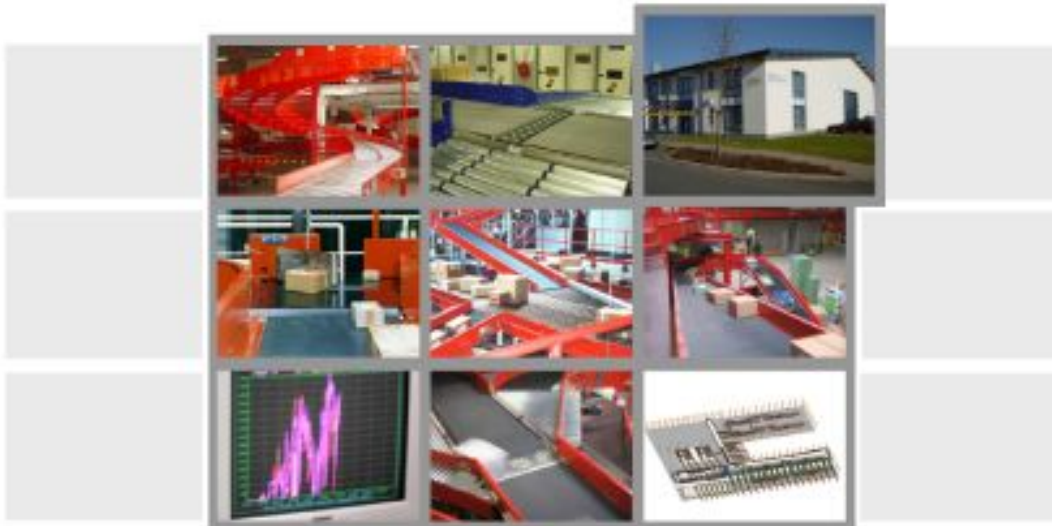

TFR3.5/11,5 M

telescopic conveyor , roller telescope , TFR 3 5/11,5 NB 1000 , telescope motive motion

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

power supply

power supply: 0,37kW

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 17400mm(57ft); width: 1230mm(4ft); min conveying level:580mm(1,9ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenance and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Other conveyor-widths project-related or on request possible.



TFR3.5/11,5 H

telescopic conveyor , roller telescope , TFR 4 5/11,5 , telescope handle motion

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

power supply

geometric dimensions

base lengt: 5000mm(16,4ft); lel. Length: 11500mm(37,7ft); width: 1230mm(4ft); min conveying level:580mm(1,9ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Other conveyor-widths project-related or on request possible.



TFR2.7,4/8 M

telescopic conveyor , roller telescope , TFR 7,4/13 , telescope handle motion

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

power supply

power supply: 0,37kW

geometric dimensions

base lengt: 7400mm(24,3ft); lel. Length: 13000mm(42,7ft); width: 1230mm(4ft); min conveying level:580mm(1,9ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Other conveyor-widths project-related or on request possible.



TFR2.7,4/13 H

telescopic conveyor , roller telescope , TFR 2 7,4/13 , telescope handle motion

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

power supply

geometric dimensions

base lengt: 7400mm(24,3ft); lel. Length: 13000mm(42,7ft); width: 1230mm(4ft); min conveying level:580mm(1,9ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features



TFR3.7,4/17,4 M

telescopic conveyor , roller telescope , TFR 3 7,4/17,4 , telescope handle motion

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Made from laquered steel sheets. All bearing in internal mounting. Control panel on the face side with lights.

drive

power supply

power supply: 0,37kW

geometric dimensions

base lengt: 7400mm(24,3ft); lel. Length: 17400mm(57ft); width: 1230mm(4ft); min conveying level:580mm(1,9ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories


All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Other conveyor-widths project-related or on request possible.

Your way to COMSORT

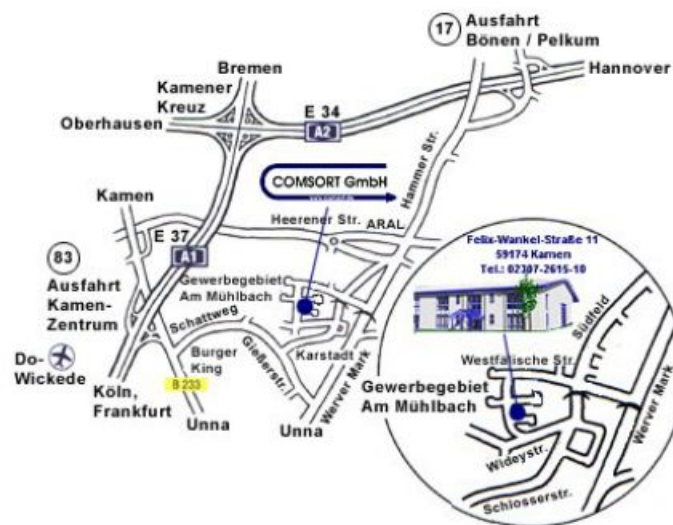

COMSORT GmbH

www.comsort.de



COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de