

High Performance Sorting Systems

Components Catalogue



500 twister sorting devices



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available!

14351

roller conveyor , conveyor , take-off roller , for spout twister

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated Profiles, standard lengths and accessories galvanized.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts.

power supply

power supply: 0,37kW

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 2000mm (6,6ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

speed: 2,2m/s (433,1 ft/min), other speed on request

additional features



TW.1000.Servo.li

sortation systems , roller systems , width 1000 , twister

conveying medium

Rubberized pulleys.

field of application

Cargo handling with individual weights up to 50kg(110lbs).

maintenance

All part are performed for easy maintenance and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

frame

Construction of galvanized special profiles. Heavy Duty cycling bogie with ball bearing and central lubrication. Swing gear with connection rods.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Belt pulleys with high performance brand-name self aligning roller bearings.

speed and performance

minimum speed: 1,4m/s (275,6 ft/min)
maximum speed: 2m/s (393,7 ft/min)
other speed on request

power supply

power supply: 1 x 1,1kW-Servo; 3 x 0,43kW

additional features

geometric dimensions

min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
375mm(1,2ft)



TW.1000.Servo.re

sortation systems , roller systems , width 1000 , twister

conveying medium

Rubberized pulleys.

field of application

Cargo handling with individual weights up to 50kg(110lbs).

maintenance

All part are performed for easy maintenance and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

frame

Construction of galvanized special profiles. Heavy Duty cycling bogie with ball bearing and central lubrication. Swing gear with connection rods.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Belt pulleys with high performance brand-name self aligning roller bearings.

speed and performance

minimum speed: 1,4m/s (275,6 ft/min)
maximum speed: 2m/s (393,7 ft/min)
other speed on request

power supply

power supply: 1 x 1,1kW-Servo; 3 x 0,43kW

additional features

geometric dimensions

min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
375mm(1,2ft)



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available

TW.1000.pneumatik.re

sortation systems , roller systems , width 1000 , twister

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of galvanized special profiles. Heavy Duty cycling bogie with ball bearing and central lubrication. Swing gear with connection rods.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Belt pulleys with high performance brand-name self aligning roller bearings.

power supply

power supply: 3 x 0,43kW, oil free compressed air 6bar

geometric dimensions

min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
375mm(1,2ft)

conveying medium

Rubberized pulleys.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 1,4m/s (275,6 ft/min)
maximum speed: 2m/s (393,7 ft/min)
other speed on request

additional features



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available

TW.1000.pneumatik.li

sortation systems , roller systems , width 1000 , twister

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of galvanized special profiles. Heavy Duty cycling bogie with ball bearing and central lubrication. Swing gear with connection rods.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Belt pulleys with high performance brand-name self aligning roller bearings.

power supply

power supply: 3 x 0,43kW, oil free compressed air 6bar

geometric dimensions

min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
375mm(1,2ft)

conveying medium

Rubberized pulleys.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories


All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

minimum speed: 1,4m/s (275,6 ft/min)
maximum speed: 2m/s (393,7 ft/min)
other speed on request

additional features

Your way to COMSORT

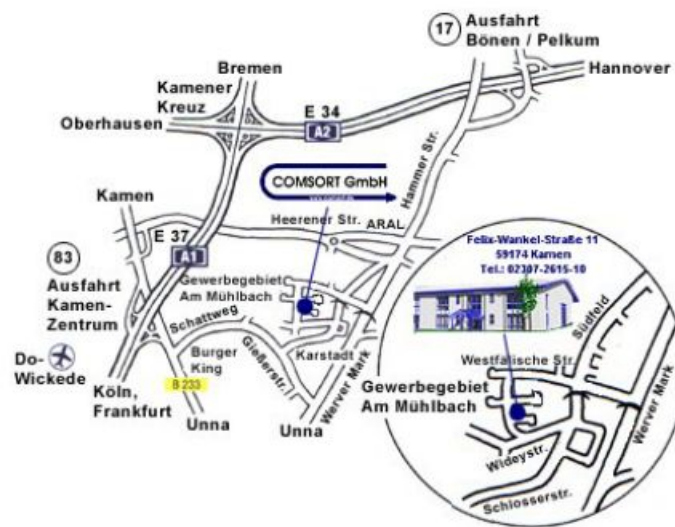

COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de