


High Performance Sorting Systems

Components Catalogue



501 pop-up sorting devices

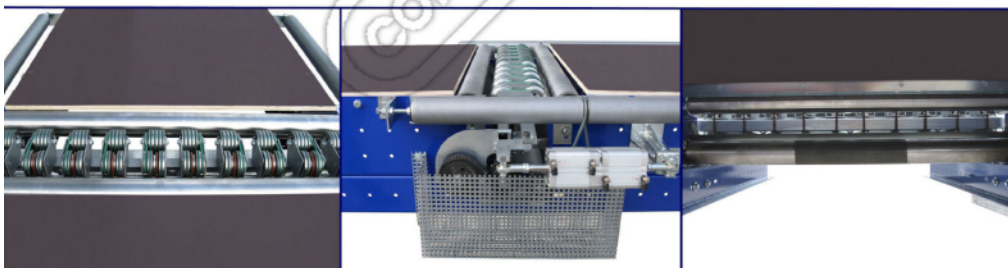

POPUP.1000
sortation systems , roller systems , width 1000

conveying medium
Rubberized pulleys. Driven by round belts.

field of application
Cargo handling with individual weights up to 50kg(110lbs).

frame
Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachement of accessories. Belt support phenol-coated for noise reduction. For segment-belt conveyors, support of heavy duty plastic.

drive
Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Return rollers with sealed bearings. Belt pulleys with high performance brand-name self aligning roller bearings.

power supply
Oil-free compressed air 6 bar


geometric dimensions
min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
2125mm(7ft)

maintenance
All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories
All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance
speed: 1,4m/s (275,6 ft/min)
other speed on request

additional features



POPUP.1000350

sortation systems , roller systems , width 1000

conveying medium

Rubberized pulleys, driven by round belts.

field of application

Cargo handling with individual weights up to 50kg(110lbs).

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachement of accessories. Belt support phenol-coated for noise reduction. For segment-belt conveyors, support of heavy duty plastic.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Return rollers with sealed bearings. Belt pulleys with high performance brand-name self aligning roller bearings.

speed and performance

power supply


Oil-free compressed air 6bar

additional features

geometric dimensions

min. conveying level over ground: 500mm(1,6ft)
net width: 1000mm (3,3ft) length:
375mm(1,2ft)

Your way to COMSORT

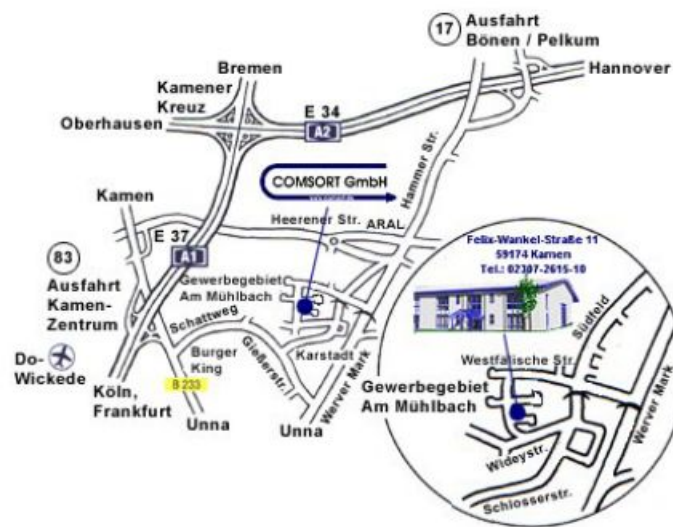

COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de