

High Performance Sorting Systems

Components Catalogue



580 chutes



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available!

Kopfstück FL Sorter li

chute , with rollers , header for FL sorter , width 1000 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

power supply

geometric dimensions

min. conveying level over ground: 240mm(0,8ft)
net width: 1000mm(3,3ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Intake guide for Sorter.
Other conveyor-widths project-related or on request possible.



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available!

Kopfstück FI Sorter re

chute , with rollers , header for FL sorter , width 1000 mm

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

power supply

geometric dimensions

min. conveying level over ground: 240mm(0,8ft)
net width: 1000mm(3,3ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Intake guide for Sorter.
Other conveyor-widths project-related or on request possible.



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available!

Endstück B1000 15°

chute , with rollers , butt for width 1000 mm , front tilt angle 15 grade

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

power supply

geometric dimensions

min. conveying level over ground: 240mm(0,8ft)
net width: 1000mm(3,3ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories


All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Other conveyor-widths project-related or on request possible.

Your way to COMSORT

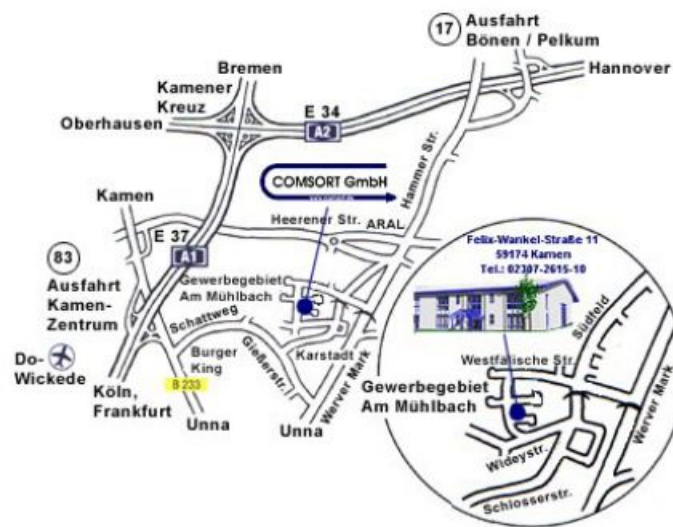

COMSORT GmbH

www.comsort.de



COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de